

# Serial Dot Matrix Printers

# T2240 T2340



## The Ultimate in Transaction Printing

Rugged, fast and affordable, the T2240/T2340 are built to handle multi-part forms with ease. Specially engineered "flat" push tractors drive forms through an uncommonly straight paper path for jam-free operation. With accessible, front-load tractors and a platen knob to facilitate forms adjustment, paper loading is quick, and down time minimal.

Tally's T2240/T2340 industrial strength forms printers deliver versatile transaction printing in no time, every time.

### Excellent Features

- Print speeds up to 500 characters per second
- 10,000 pages per month workload
- 24-pin configurations produce letter-quality print
- 80-column (small footprint) or 136-column configurations available

### Reliable Forms Handling

- Straight paper path means jam-free operation
- Up to 6-part forms (T2240)
- Front load single sheet feed standard; optional 150 page sheet feeder
- Zero tear-off means no wasted forms
- Optional 2nd tractor

### Ease of Use

- Easy to set up
- Simple to operate control panel
- Platen knob for easy form adjustment

Monochrome Laser  
Line Matrix **Computer Printers**  
Color Laser Ink Jet  
Serial Dot Matrix

EXPECT **More.**

**Tally**<sup>®</sup>  
Computer Printers



# The T2240 & T2340 Transaction Printers

Features & Specifications	T2240/2340
Print Technology	Serial Impact Dot Matrix
Print Speed (10 CPI)	9-wire: Draft: 413 cps, Copy Draft: 310 cps, NLQ: 77 cps 24-wire: Draft: 409 cps, Copy Draft: 275 cps, LQ: 91 cps
Print Head Type	T2240/9: 9-wire T2240/24 & T2340/24: 24-wire
Printhead Life	300 million
Max. Recommended Workload	10,000 pages per month
MTBF	12,500 hours
Noise Level	53 dB(A) LQ
Buffer Size	40K
Graphic Resolution (V x H)	9-wire: 144 x 240 dpi 24-wire: 360 x 360 dpi
Character Density	10, 12, 15, 17.1, 20 cpi + Elongated
Line Density	2, 3, 4, 6, 8, 12 lpi
Fonts	9-wire: Draft, Copy Draft, Courier, Quadrato, OCR A & OCR B, Bar Code + LCP 24-wire: Draft, Copy Draft, Courier, Roman, San Serif, Prestige, Script, OCR A & OCR B, Bar Code + LCP
Compatibility	9-wire: MTPL*, IBM® Proprinter XL, Epson® FX850+/FX1050+ 24-wire: MTPL*, IBM® Proprinter XL24e, Epson® LQ850+/LQ1050+ /Esc P
Paper Handling	Std: Flat push tractors (front/bottom), straight path for continuous forms and labels, auto paper load, auto quick tear, auto view, paper advance knob; supplemental push tractor and automatic sheet feeder options available
Copies	9-wire: 1 + 5 24-wire: 1 + 3
Paper Width	Continuous Forms: T2240 = 3" - 10" T2340 = 3" - 16" Cut Forms: T2240 = 3" - 10" T2340 = 3" - 16.5"
Form Length	Continuous Forms = 3" - 22"; Cut Forms = 3" - 14"
Ribbon	Cassette: 4 million characters
Power Requirements	AC 120V +/- 10%, 60 Hz AC 220V - 240V +/- 10%, 50 Hz
Consumption	50 watts (operating)
Physical (W x D x H)	T2240: 19" x 9.7" x 7.9"; 17.6 lbs. T2340: 24.6" x 9.7" x 7.9"; 22 lbs.
Interfaces	Std: bi-directional Centronics Parallel; Optional: RS232 Serial, RS422 Serial Interfaces
Options	Push tractors, front; automatic cut sheet feeder, front; RS232 Serial, RS422 Serial Interfaces

\* Tally Printer Language

## Tally Printer Outlet

1-866-430-6202

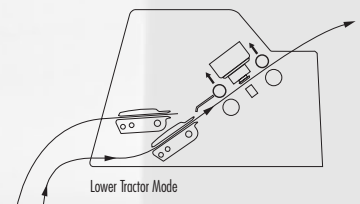

T2240: 9 or 24-wire, narrow carriage



T2340: 24-wire, wide carriage

**Tally**®  
Computer Printers



BSEN ISO 9001:1994  
Certificate No. FM 28149



3/03. Specifications subject to change without further notice, all product and brand names are trademarks of the respective companies.  
Copyright © 2003, Tally Printer Corporation. Tally and Tally logo are registered trademarks of Tally Printer Corporation.

Tally Printer Outlet.Com  
1-866-430-6202

**Fax for a Quick Quote**  
**817-430-6250**

Choose Model:

T2240    T2340

Organization \_\_\_\_\_

Name \_\_\_\_\_

Phone (\_\_\_\_\_) \_\_\_\_\_ Fax Number (\_\_\_\_\_) \_\_\_\_\_

E-Mail \_\_\_\_\_

Address \_\_\_\_\_

City \_\_\_\_\_ State \_\_\_\_\_ Zip \_\_\_\_\_

Please indicate your specifications or requirements:

---

---

Additional Comments:

---

---